


Panel PC

GSR-PF15 Series

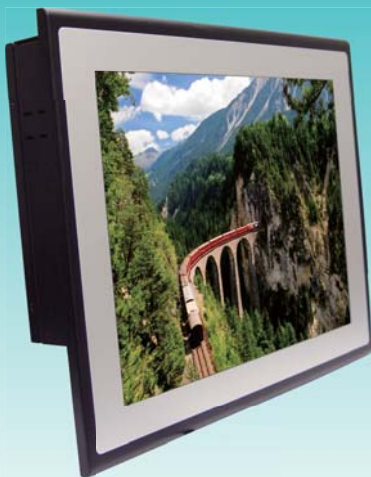

Touch Screen

Feature :

Intel Core 2 Duo, Atom / VIA solution, Fanless, Touch screen, Water Proof, LED Backlight Panel, Open-frame design

Panel PC Information

LCD Panel	AUO
Resolution	XGA 1024 x 768
Brightness (cd/m2)	350
Contrast Ratio	700 : 1
Backlight	LED / CCFL
Number of Colors	262144
Touch Screen	AMT 8 wires / Resistive touch screen
Mounting Spec.	VESA 75/100 / Panel Mount
Panel frame water proof	IP65
Webcam (Option)	5.0 Mega pixel - auto focus
Accessory (Option)	Wall Mount Kit / Stand

Application:

Information Kiosk, POS, Mobile solution, Automation control

Fanless Panel PC :

Panel PC Dimension	75.5 H x 384 W x 312 D mm (For Lex STD M/B)
	66 H x 384 W x 312 D mm (For 3.5" M/B)
Case Dimension	65.5 H x 354.2 W x 282.6 D mm (For Lex STD M/B)
	56 H x 354.2 W x 282.5 D mm (For 3.5" M/B)
Front Panel Dimension	10 H x 384 W x 312 D mm
Material	Plastics front frame + Aluminum
Weight	5 Kgs (Incl. M/B)
Storage Space	2.5" / 3.5" HDD
Operation Humidity	5 - 90% @ 39 °C, non-condensing

M/B information: (Please refer to M/B specification)



CPU Type	M/B Model	VGA	COM	LAN	USB	Audio	KB/MS	Others	Operation Temp.	
									CF Card	HDD
Intel Atom D525 1.8GHz	3I525CW	1	6	2	2	YES	-	-	55°	50°
	BI525CW	1	6	2	2	YES	-	Rechargeable Battery	-	-
Intel Atom N270 1.6GHz	3I270C	-	6	1	2	YES	-	-	50°	50°
	CI270CW	1	6	2	4	YES	YES	DVI	55°	45°
	MI270AW	1	2	2	4	YES	YES	DVI / TV-Out / Video-In	55°	45°
Intel Core 2 Duo Socket M	CI945C	1	6	2	4	YES	YES	DVI	50°	50°
	MI945A	1	2	2	4	YES	YES	DVI / TV-Out / Video-In	50°	50°
VIA Nano E-series 1 GHz	3V900C	1	5	1	2	YES	-	DISPLAY Port	-	-

More Functions

Aluminum / Stainless Case	Capacitive touch	Webcam	Parallel Port
DC +6V to +36V	High Brightness Panel	1 ~ 4 Video-IN	Bluetooth
Rechargeable Battery	DIO	Speaker	Wi-Fi
3G	4 x COM	H.264 decode	USB
			Optional LAN
			GPS

The above available functions outline the possibility with system, for more information please contact us.

Dimension

